
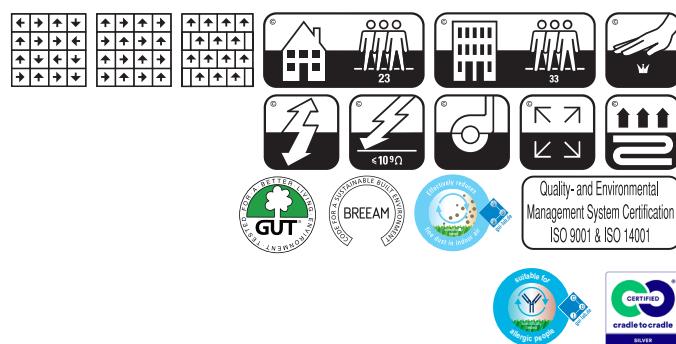


Grezzo EcoBase

Preliminary specification according to EN 1307

Type of manufacture	ISO 2424	Tufted 1/10 "					
Aspect	ISO 2424	Structured loop pile					
Dye method		Solution dyed					
Dimension	EN ISO 24342	cm x cm	50 x 50 / 19,68" x 19,68" (20 tiles per box)				
Primary backing	ISO 2424	Polyester fleece					
Secondary backing	ISO 2424	EcoBase - 100% recyclable, contains on average 80% positively defined recycled content.*					
Pile fibre composition	ISO 2424	BCF Polyamide 6					
Total thickness	ISO 1765	mm	7.0	inch	0.3		
Effective pile thickness	ISO 1766	mm	3.5	inch	0.14		
Total mass	ISO 8543	g/m ²	4150	oz/yd ²	122.5		
Total pile mass	ISO 2424	g/m ²	650	oz/yd ²	19.2		
Effective pile mass	ISO 8543	g/m ²	395	oz/yd ²	11.7		
Pile density	ISO 8543	g/cm ³	0.113	lb/in ³	0.0041		
Number of tufts	ISO 1763	/dm ²	1580	/yd ²	132104		
Stroll test	ISO 6356	kV	≤ 2,0				
Vertical resistance	ISO 10965	Ohm	≤ 1 x 10 ⁹				
Horizontal resistance	ISO 10965	Ohm	-				
Use classification	EN 1307	33 Commercial - heavy use					
Luxury rating	EN 1307	LC 1					
Dimensional stability	EN 986	%	≤ 0,2				
Impact sound reduction ΔL _W	ISO 10140	dB	25				
Sound absorption	ISO 354	Freq. Hz	125	250	500	1000	
		α _s	0.01	0.03	0.08	0.19	
					0.33	0.36	
Noise reduction	ISO 354	α _w	0.20				
Thermal resistance	ISO 8302	m ² .K/W	0.082				
Flammability	EN 13501-1	Bfl - s1 (loose laid tested)					
Prodis - GUT	www.pro-dis.info	4E61DB96					

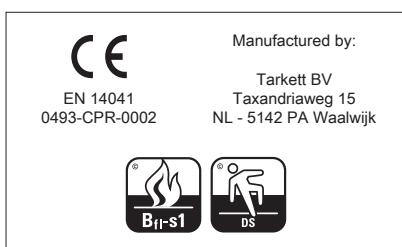

* DESSO EcoBase® is a polyolefin based backing. Positively defined means: all ingredients have been assessed as either Green (optimal) or Yellow (tolerable) according to the Cradle to Cradle® assessment criteria. As described in Cradle to Cradle® Certified CM Product Standard Version 3.1. The total % of recycled content varies per product and per colour which can be found on our website: www.tarkett.com For products with acoustic backing: SoundMaster/SoundMaster Lite backings contain 80% recycled polyester felt, SoundMaster Thrive is a low anti-mony polyester felt.

DESSO flooring products are to be installed in full accordance with Tarkett's installation instructions and recognized trade standards. An effective, regular cleaning and maintenance program is vital for retaining a high appearance level. DESSO flooring products should only be used as floorcoverings. Note: Tarkett reserves the right to change this specification without prior notice; changes are subject to normal production tolerances. For the latest versions of the technical specifications, visit www.tarkett.com

EN-20230211